


The Q.bloxx-XE PWR Power Adapter supplies and configures Q.bloxx XE modules without EtherCAT bus coupler. To operate in an EtherCAT system, the adapter must be replaced by an EtherCAT bus coupler. The adapter provides 10-30 volts and allows access to the internal communication interface (UART). For this, an RS485 adapter and the Gantner configuration software ICP100 are necessary.

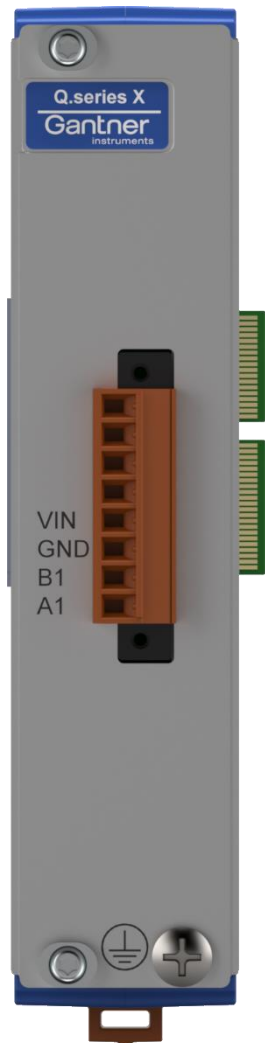

The adapter must be connected via an 8-pin screw terminal. The assignment is as follows:

Pin	
1	
2	
3	
4	
5	VIN - Versorgung +10 ... 30 VDC
6	GND - Versorgung 0 V
7	B1 - RS-485 UART B
8	A1 - RS-485 UART A

Ordering Informationen

Article Information	762124- Q.bloxx-XE PWR Sockel
---------------------	-------------------------------